


Flow Rate

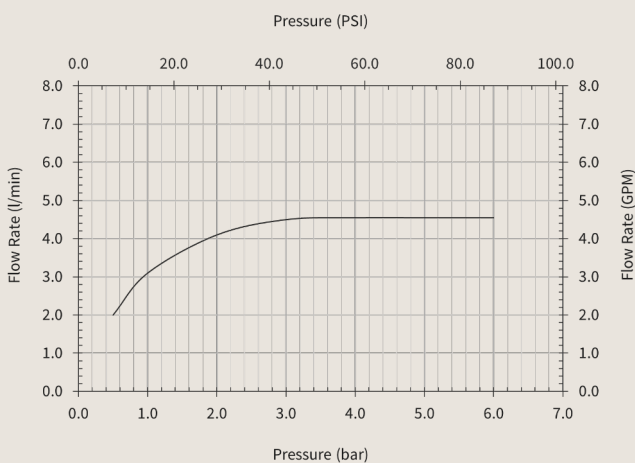

Product Description

- Kit comprising of: 1 x S101 (Spout), 1 x C002 (Valve), 2 x H002 (Handle)
- Swappable Handle Accents
- Separate 1/4 turn hot and cold controls
- Pivoting Spout Aerator to allow redirection of water flow to suit basin design.
- Removable spout aerator for cleaning
- Coloured flow restrictor fitted into aerator
- 2 x 1/2" flexible hoses included
- Requiring 3 x 35mm diameter holes in counter
- Recommended spacing: 100mm (centre-to-centre)
- Maximum counter thickness: 35mm
- Ensure balanced feed pressures between 1-5 bar

Main Finishes Available

- | | |
|--------------------------|------------------------|
| G01 Simply Chrome | P01 Warm Brass |
| G02 Silver Steel | G04 Dark Bronze |
| G03 Soft Black | |

Side Accents Finishes Available

- | | |
|--------------------------|---------------------------|
| G01 Simply Chrome | P03 Pink Sand |
| G02 Silver Steel | P05 Riverbank |
| P01 Soft Black | P08 Almost Harvest |
| G03 Warm Brass | S01 White Carrara |
| G04 Dark Bronze | S02 Green Forest |
| P02 Bleached Deck | |

Product Care

- Our finishes require both drying after use as well as careful & regular cleaning routines.
- Water pH should be balanced between 6.5 - 8.5 and should be free of minerals.
- Normal cleaning should only be done with mild liquid soap in warm water, applied with a microfibre cloth.
- Mineral buildup can be removed with lemon juice in water, applied with a microfibre cloth and then rinsed.
- Occasional application of a premium quality car body wax will help reduce mineral based standing water marks.